


The lead substitute for the roof

Made from
recycled raw
material!

FLECK ECO FORM EASY, the self-adhesive flashing for the wall, fireplace, valley, window, dormer and much more

FLECK ECO FORM EASY is a new type of substitute for rolled lead. Its production is very environmentally friendly. Its is also safe to use. It is easy to apply and is particularly suitable for sealing flashings on roofs, for example, in the following areas:

- 1 Chimneys
- 2 Dormers
- 3 Roof windows
- 4 Barge boards
- 5 Walls and other roof structures

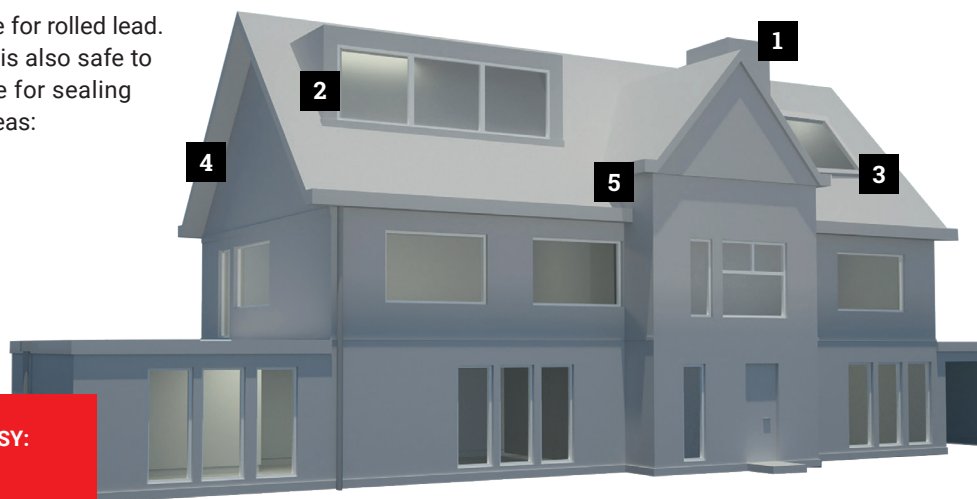

Find out more about FLECK ECO FORM EASY:
fleck-dach.de/en/eco-form-easy

The sustainable alternative to rolled lead



Ecologically manufactured

Unlike conventional wall-chimney flashings such as FLECK WK-Alu-Flex, FLECK ECO FORM EASY is made from recycled polyvinyl butyral (PVB). This is acquired from high-quality automotive laminated glass interlayer films in a special recycling method. Leadax, the manufacturer of the product, processes the raw material to produce FLECK ECO FORM EASY. The expanded metal used is aluminium. By reusing the recycled raw material, a contribution is made to reducing global waste.



Recyclable

FLECK ECO FORM EASY is UV-stable and very durable. It generally withstands exposure to the weather at least as long as all other materials on the building envelope. It can therefore remain on the roof for a number of decades without hesitation. However, when the product does have to be replaced, Leadax can use the material to produce new FLECK ECO FORM EASY.




Strict production, product properties and recyclability criteria must be met in order to obtain the "sustainable product" marking. The assessment criteria of the ZVDH are based on the "Sustainable building rating system of the Federal Government" (BNB) in Germany as well as the state "Sustainable building quality seal" (QNG).

1 product – innumerable advantages

FLECK ECO FORM EASY is a new type of product that replaces rolled lead on the building and at the same time reduces environmental impact. Apart from the ecological aspect, it offers installers other advantages:

- Easier to apply and transport, as it is up to 75 % lighter than rolled lead
- Very high extensibility – without cracking
- Easy to cut with stable snips
- Easy to mould and install
- Optimum value for money
- UV-stable and very durable
- Available in the colours: lead grey, black and brick red

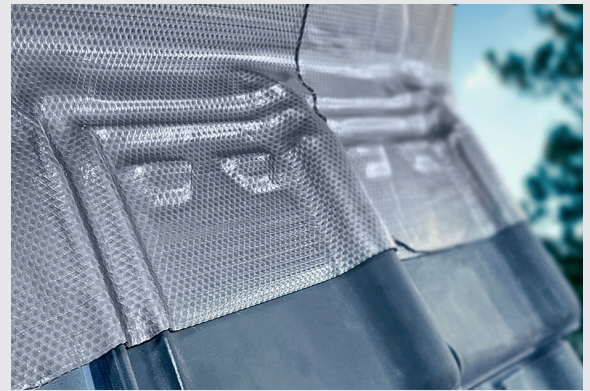

The material is so mouldable that even roofing details can be highlighted.

Easy to use

It is installed with the help of the **two adhesive strips** on the back. The material can be moulded by hand or with the help of a dresser or roller.



Technical data

- Installation aid: 2 × self-adhesive strips
- Roll width: 280 mm
- Roll length: 5 m

Available in three colours:



Lead grey




Black




Brick red

Installed in only four steps

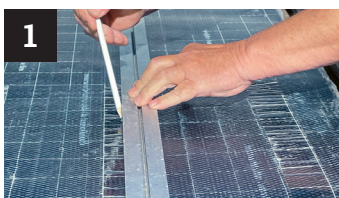

Measure

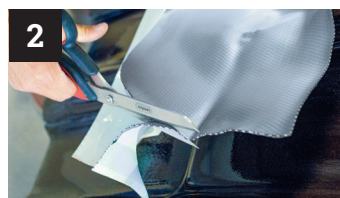

Cut



Preform



Boss the details