




FLECK Underlay sealing collar

PRODUCT INFORMATION

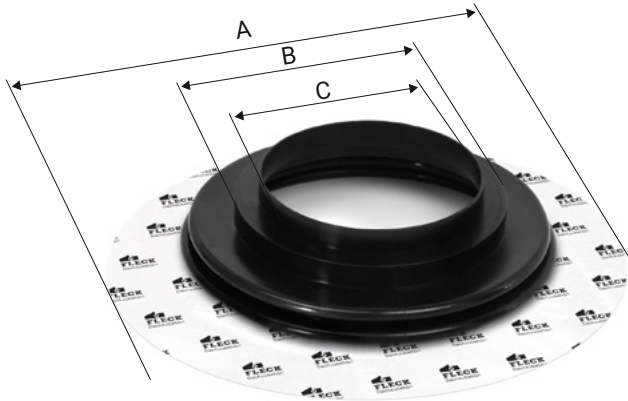

FLECK underlay sealing collars have a collar with a self-adhesive surface on the back and are used to make windtight connections between FLECK vents in DN 100/125 or DN 150 and underlays. The EPDM sealing collar with the self-adhesive collar can be easily mounted on the vent pipe or on the flexible universal hose, positioned on the roof and bonded to the underlay.

FLECK highlight

Due to the round collar shape, a horizontal sealing run is avoided, draining water is therefore not stopped by the joint.

Note

- The adhesive surface must be thoroughly cleaned before installation
- The surface should be dry, dust-free and free of release agents or oily residues

Dimensions in mm



Installation instructions
fleck-dach.de/en/services/downloads/

Nominal diameter	A	B	C
DN 100/125	340	till 125	till 110
DN 150	340	-	till 160

Dimensions in mm

